




6046 Extension ladder, two-section

- › Inner width of the ladder 300 mm (upper section).
- › Stiles of seamless extruded profiles with ergonomic shape.
- › Rungs made of extruded profiles with deep ribbing, and therefore increased slip resistance.
- › Folding feet with large bearing surface and high stability.
- › The high-quality fittings are equipped with plastic sliders on the inside (ensure a better sliding behaviour of the sections).
- › With high-quality plastic wall rollers from size 2×14.
- › Stable stiffening braces on first step.

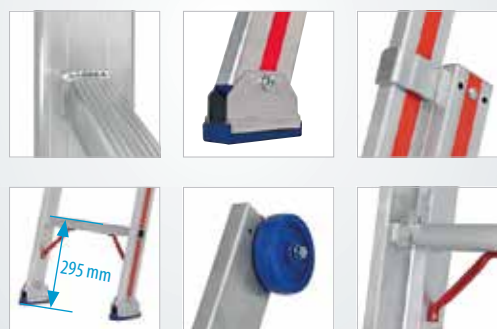

Number of rungs		2×6	2×8	2×10	2×12	2×14	2×16	2×18
Stile	approx. mm	60	60	66	71	83	89	89
Number of rungs at max. extension		10	14	17	21	25	29	32
Length retracted	approx. m	1.85	2.40	2.97	3.53	4.20	4.74	5.30
Length extended	approx. m	2.97	4.09	4.93	6.05	7.26	8.38	9.22
Standing height	approx. m	1.92	2.92	3.92	4.92	5.92	6.92	7.92
Working height	approx. m	3.42	4.42	5.42	6.42	7.42	8.42	9.42
Reach height	approx. m	3.92	4.92	5.92	6.92	7.92	8.92	9.92
Width extended top/bottom	approx. mm	355/425	355/425	355/425	355/425	355/425	355/425	355/425
Weight	approx. kg	7.2	9.2	11.3	14.1	18.3	22.8	26.9
EAN-Code		4019502338364	4019502338371	4019502338388	4019502338395	4019502338401	4019502338418	4019502338425
Order no.		604612	604616	604620	604624	604628	604632	604636

For an explanation of working/standing/reach height see on page 5.

Recommended accessories:



P. 176

Cross-beam
for ladder section



P. 174

Set of foot pikes
for stiles



P. 178

Telescopic wall spacer
for rung ladders



P. 178

Ladder holder set
for gutters



P. 182

Ladder bracket set
for roof racks