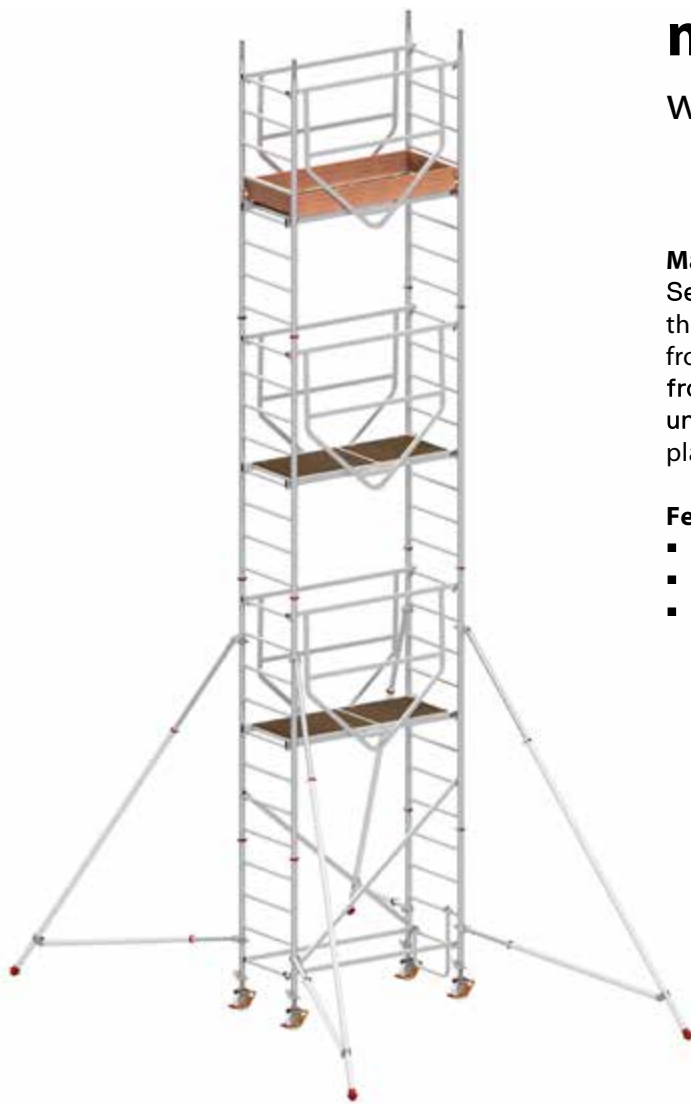


7070

ADVANCED SAFE-T mobile tower with stabiliser





Maximum safety, impressively comfortable:

Secure standing space in every phase of assembly thanks to SAFE-T safety guardrail, already hooked in from below. Telescopic stabilisers with bayonet catch from a reach height of 7.27 metres to compensate for uneven floors. Weatherproof and non-slip spacious platform. With four height-adjustable swivel castors.

Features:

- **Work platform: 1.58 x 0.61 m**
- **Castors: Ø 150 mm**
- **Permissible load: 200 kg/m² (2.0 kN/m²)**

						
Assembly configurations	Module 1	Module 1+KIT +stabiliser	Module 1+2	Module 1+2+KIT	Module 1+2+3	Module 1+2+3+KIT
Reach height (approx. m)	3.27	4.27	5.27	6.27	7.27	8.27
Tower height (approx. m)	2.49	3.49	4.49	5.49	6.49	7.49
Standing height (approx. m)	1.27	2.27	3.27	4.27	5.27	6.27
Platform length (approx. m)	1.58	1.58	1.58	1.58	1.58	1.58
Frame section width (approx. m)	0.72	0.72	0.72	0.72	0.72	0.72
Ballasting						
Indoor, centre (kg)	100	0	0	40 ⁽²⁾	40	80
Indoor, on wall (kg)	100 ⁽¹⁾	50 ⁽¹⁾	80 ⁽¹⁾	120 ⁽¹⁾	130 ⁽¹⁾	160 ⁽¹⁾
Outdoor, centre (kg)	120	0	0	40 ⁽²⁾	40	100
Outdoor, on the wall (kg)	120 ⁽¹⁾	60 ⁽¹⁾	100 ⁽¹⁾	140 ⁽¹⁾	170 ⁽¹⁾	220 ⁽¹⁾
Order no.	707003	707004	707005	707006	707007	707008

⁽¹⁾ Ballasting is not required when two wall connectors (707241) are used.

⁽²⁾ Ballasting is not required when using four stabiliser extensions (707037).

Required additional parts from page 23.

Individual parts and parts list can be found in the instructions for assembly and use on page 3. | [Click here.](#)